


LED Intelligent Driver

- Dimming interface: DALI, Push DIM.
- Dimming range from 0-100%, LED start at 0.1% possible.
- DALI protocol: DALI 1, DALI 2.
- DALI dimming curve: Linear curve or logarithmic curve.
- 0-100% flicker-free, achieve the level of exemption assessment.
- Over-heat / Over voltage / Over load / Short circuit protection, recover automatically.
- Standby Power Loss < 0.5W
- Full protective plastic housing.
- DALI bus standard: IEC62386-101,102, 207.
- Compliant with Safety Extra Low Voltage standard.
- Suitable for indoor I /II/III type lamps application.

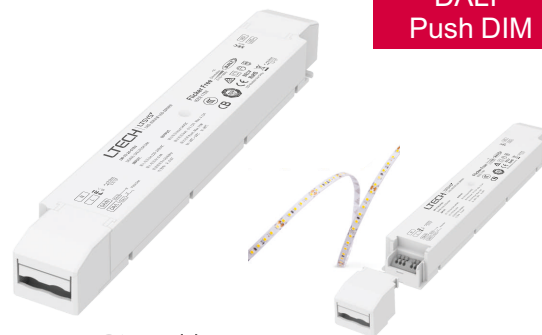

Flicker-free

IEEE 1789
Achieve the exemption level.

Dimmable:

0.1%-100%





Specification

| Model | LM-75-12-G1D2 | LM-75-24-G1D2 | LM-100-24-G1D2 | |
|----------------------|---------------------------|--|--|------------------------------|
| OUTPUT | Output Voltage | 12Vdc | 24Vdc | |
| | Output Voltage Range | 12Vdc ±0.5Vdc | 24Vdc ± 0.5Vdc | |
| | Output Current | Max. 6.25A | Max. 3.125A | Max. 4.17A |
| | Output Power | Max. 75W | | Max. 100W |
| | Output Power Range | 0-75W | | 0-100W |
| | Strobe Level | High frequency exemption level. | | |
| | Dimming Range | 0-100%, dimming depth: Max. 0.1% | | |
| | OverLoad Power Limitation | ≥ 102% | | |
| | Ripple & Noise | ≤ 200mV | ≤ 300mV | |
| PWM Frequency | ≤ 3600Hz | | | |
| INPUT | Dimming Interface | DALI (IEC62386), Push DIM | | |
| | Input Voltage | 220-240Vac | | |
| | Frequency | 50/60Hz | | |
| | Input Current | Max. 0.4A/230Vac | Max. 0.5A/230Vac | |
| | Power Factor | PF>0.97/230Vac, at full load | | PF>0.98/230Vac, at full load |
| | THD | ≤ 14% at 230Vac, at full load | | 230Vac@THD≤12%, at full load |
| | Efficiency (typ.) | 91% | 92% | 93% |
| | Standby Power Loss | <0.5W | | |
| | Inrush Current(typ.) | Cold start 40A at 230Vac | | Cold start 45.2A at 230Vac |
| | Control surge capability | L-N:2KV | | |
| Leakage Current | Max. 0.5mA | | | |
| ENVIRONMENT | Working Temperature | ta: -20°C ~ 50°C tc: 80°C | | |
| | Working Humidity | 20 ~ 95%RH, non-condensing | | |
| | Storage Temp., Humidity | -40°C ~ 80°C, 10-95%RH | | |
| | Temp. Coefficient | ±0.03%/°C (0-50°C) | | |
| | Vibration | 10-500Hz, 2G 12min./1cycle, period for 72min. each along X, Y, Z axes. | | |
| PROTECTION | Over-heat Protection | Intelligently adjusting or turning off the output current if the PCB temperature ≥ 110°C, auto recovers. | | |
| | Over Voltage Protection | Shut down the output when non-load voltage ≥ 13V, auto recovers. | Shut down the output when non-load voltage ≥ 26V, auto recovers. | |
| | Over Load Protection | Shut down the output when current load ≥ 102%, auto recovers. | | |
| | Short Circuit Protection | Shut down automatically if short circuit occurs, auto recovers. | | |
| SAFETY & EMC | Withstand Voltage | I/P-O/P: 3750Vac | | |
| | Isolation Resistance | I/P-O/P: 100MΩ/500VDC/25°C/70%RH | | |
| | Safety Standards | IEC/EN61347-1, IEC/EN61347-2-13 | | |
| | EMC Emission | EN55015, EN61000-3-2 Class C, IEC61000-3-3 | | |
| | EMC Immunity | EN61000-4-2,3,4,5,6,8,11 EN61547 | | |
| Strobe Test Standard | IEEE 1789 | | | |
| OTHERS | Dimension | 293×43×30mm(L×W×H) | | |
| | Packing | 296×44×33mm(L×W×H) | | |
| | Weight(G.W.) | 300g±10g | | |

* The driver is suitable for connecting resistor current-limiting LED fixture (e.g. LED strip). The instantaneous surge current will be several times increased if connecting built-in constant current IC current-limiting LED fixtures, the driver will activate the overloaded protection (hiccups flickering). When you order, please remark controlling the constant current LED fixture (e.g. MR16 lamp, underground light, LED wall washer, constant current LED strip, etc.), then we can prepare the special programs.

Dimensions

Unit: mm

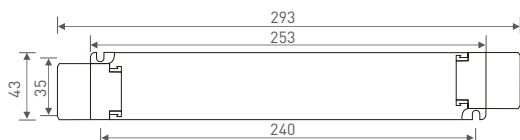


Wiring Diagram




Application of Protective Cover

Wire pressing board:






Push the wire pressing board to fix the wire.



Push outward the side plate, meanwhile use the tool to uninstall the wire pressing board.

Uninstall protective cover:



Break off the bottom left and right to remove the protective cover.





Push Dimming







Reset switch

- On/off control: Short press.
- Stepless dimming: Long press.
- With every other long press, the light level goes to the opposite direction.
- Dimming memory: Brightness will be the same as previously adjusted when turning off and on again.





Relationship Diagrams

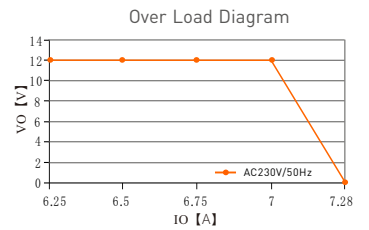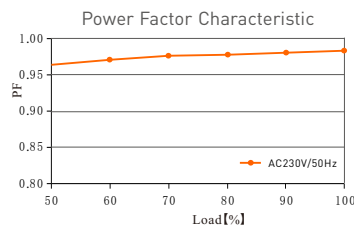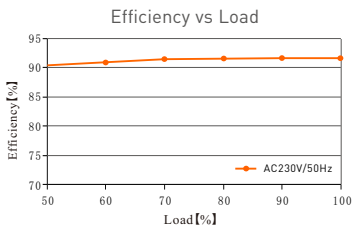

LM-75-12-G1D2

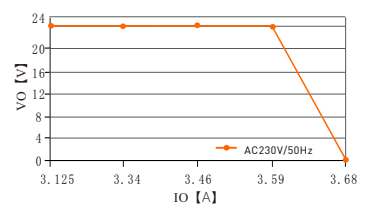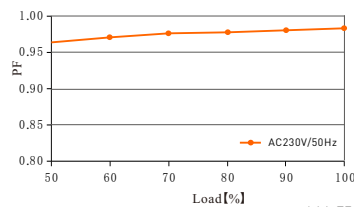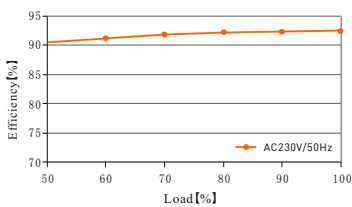

LM-75-24-G1D2

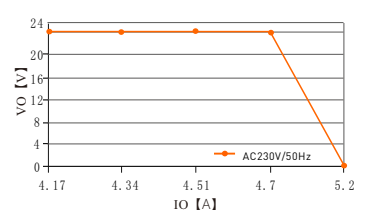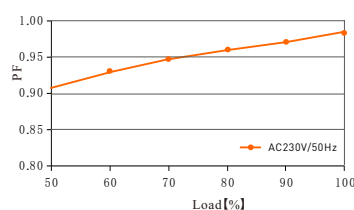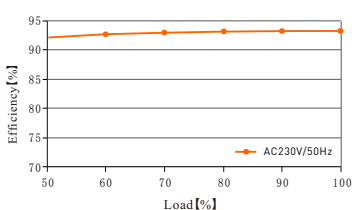

LM-100-24-G1D2