


Flexglo™ F22 Horizontal Bending (Silicone)

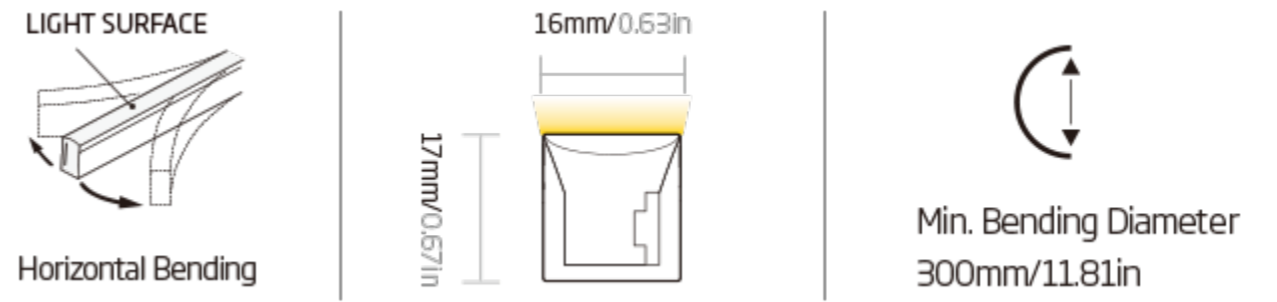

ClearTech™ TwinFlex™ C-Mask™ PinBoost™ V-Optic™

5
Year
Warranty

ANSI
C78.377

3
SDCM

55 °C
-40 °C
Ambient Working
Temperature

Anti
yellowing

Working Temp. -40~55°C / -40~131°F
 Storage Temp. -40 ~ 60°C / -40~140°F
 Voltage 24CV
 Min. Cutting Length 83.30mm

Abmient Installation Temp. -40°C / -40°F
 Max. Mounting Surface Temp. 85°C / 185°F
 Power/m 12.00
 Max. Running Length 15.00m

Optical Parameters

Item Code	Finished Product						
	Color/CCT	Wavelength/CCT Tolerance	Color Tolerance	CRI	R9	Lumen/m	Lumen/ft
C-SFR-F22D-HB-24CV-22~57K-WM-144-12W-83.3	5700K	5669±305K	5SDCM	80	N/A	270.00	82.32
C-SFR-F22D-HB-24CV-22~57K-WM-144-12W-83.3	2200K	2238±66K	5SDCM	80	N/A	220.00	67.07

Connector Type

IP68 Silicone Injection-moulded Connector

Front Connector End	Front Connector Side from Left	Front Connector Side from Right	Front Connector Bottom	Seamless Middle Connector & Power Feed	Middle Connector & Power T-feed	Jumper	End Cap
				N/A			
F22B-HB-SIM/FC-01/02-E-0.3m/1m/3m/5m/10m/15m/20m 18AWG*2	F22B-HB-SIM/FC-02-SL-0.3m/1m/3m/5m/10m/15m/20m 18AWG*2	F22B-HB-SIM/FC-01-SR-0.3m/1m/3m/5m/10m/15m/20m 18AWG*2	F22B-HB-SIM/FC-01/02-B-0.3m/1m/3m/5m/10m/15m/20m 18AWG*2	N/A	F22B-VB-SIM/MC-PTF-0.3m/1m/3m 18AWG*2	F22B-VB-SIM/JU-0.3m/1m 18AWG*2	F22-SIM/EC

Mounting Profile



Bendable Serrated Aluminum Profile
 F22-BSA/PL-500/1000mm
 W20.2*H20.8MM
 (Tolerance ±0.3mm)
 Note: only horizontal bending is available

