




## Flen Bollard

The robust Flen bollard is ideal for lighting yards and pathways. The bollard's UV-protected polycarbonate dome and powder-painted aluminium body can withstand both sunlight and maritime environments without fading. The Flen shines glare-free light in four directions and creates a light pattern on the ground. Install together with a concrete base and a support tube (4107058), or choose a ground support tube (4107104) that can be sunk directly into the ground. The Flen series also contains two wall luminaires.



- Body made of aluminium and dome made of UV-protected polycarbonate.
- Anthracite.
- Type of wiring, ending 3 x 2.5 mm<sup>2</sup>.
- Colour temperature 3,000 K. CRI > 80, RA > 80.
- IP44.
- Fixed LED 13W / 1,100 W, 30,000 h (Osram).
- Temperature of environment of use -20 ... 25 °C.
- L70 30,000 h (Ta 25 °C).
- To enable linking, a mini junction box (1602606) is available as an accessory.

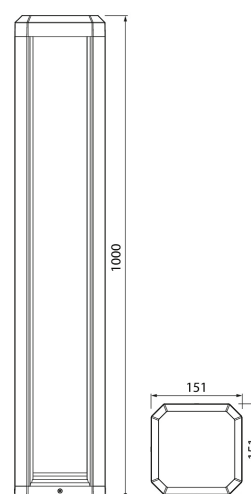

• In stock

### Flen Bollard

NO.	CODE		W	LM
• 4126253	A1FLEC	IP44 13W/830 PCC ANT H1000	13	1100