


## Extension leads

### Häfele Loox5 extension leads

**!** Maximum lead length from the Loox5 driver to the device is 10 m.

Long cable lengths in combination with large loads (strip light lengths) can result in voltage losses in the cable. These lead to visible loss of brightness in the lights. The illuminance listed with the lights has been determined with the rated output voltage of the driver. (12 V or 24 V).


### Häfele Loox5 extension leads monochrome

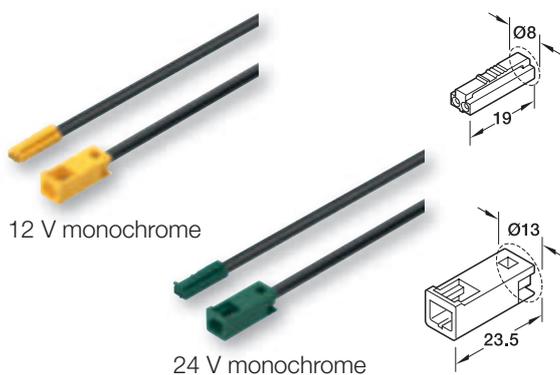

- > Area of application: For monochrome lights and other 2-pin devices and distributors
- > Material: Plastic
- > Current carrying capacity: Max. 5 A
- > Drill hole Ø: Plug 8 mm, socket 13 mm
- > Supplied with: 1 extension lead  
1 plug/1 socket

Type of cable 20	Voltage	500 mm	1000 mm	2000 mm
Monochrome (2-wire 18 AWG)	5 12V	833.95.712	833.95.713	833.95.714
	5 24V	833.95.719	833.95.718	833.95.717


### Häfele Loox5 extension leads multi-white

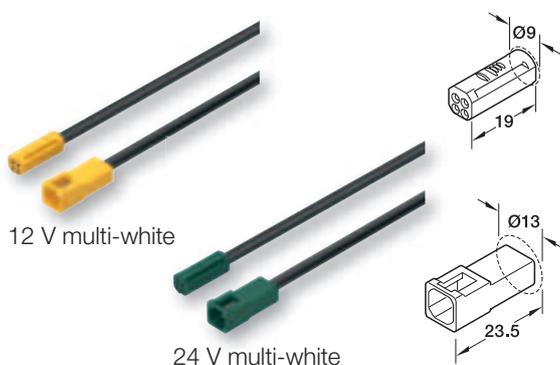

- > Area of application: For multi-white lights
- > Material: Plastic
- > Current carrying capacity: Max. 3.5 A
- > Drill hole Ø: Plug 9 mm, socket 13 mm
- > Supplied with: 1 extension lead  
1 plug/1 socket

Type of cable	Voltage	500 mm	1000 mm	2000 mm
Multi-white (3-wire 20 AWG)	5 12V	-	-	833.95.715
	5 24V	-	-	833.95.720

### Häfele Loox5 extension leads RGB

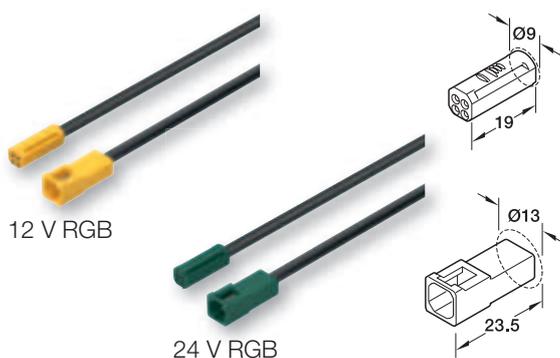

- > Area of application: For RGB lights
- > Material: Plastic
- > Current carrying capacity: Max. 3.5 A
- > Drill hole Ø: Plug 9 mm, socket 13 mm
- > Supplied with: 1 extension lead  
1 plug/1 socket

Type of cable	Voltage	500 mm	1000 mm	2000 mm
RGB (4-wire 20 AWG)	5 12V	-	-	833.95.716
	5 24V	-	-	833.95.721