

Profile for recess mounting Häfele Loox5, Profile 1104




- > Material: Profile: Aluminium, Diffuser: Plastic
- > Internal width: 8 mm
- > Diffuser width: 8 mm
- > Routing width: 10.9 mm
- > Routing depth: 12 mm

Note
Suitable for use with LED strip lights max. 5 mm wide.
Slide-in clips from the side before installing the profile.

Diffusers
The opal white diffuser creates a uniform light without points from 120 LEDs/ m. Points are visible with black version. If required, please order alternative diffusers in black or transparent separately.


Supplied with
1 aluminium profile 1 diffuser opal white

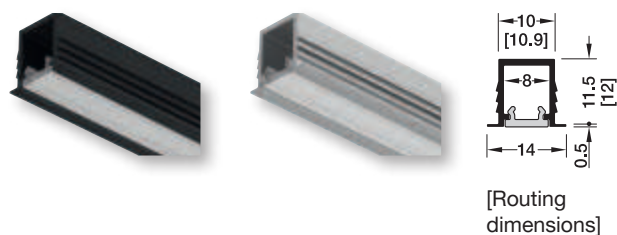

Colour/finish	Light permeability	2500 mm	3000 mm
Profile: Black, Anodized Diffuser: Opal white	70–80%	833.94.103	833.95.725
Profile: Silver coloured, Anodized Diffuser: Opal white	70–80%	833.94.102	833.95.724

Packing: 1 Piece

→ End cap, for Häfele Loox5 profile for recess mounting, profile 1104

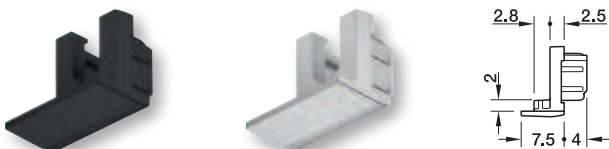

- > Material: Plastic
- > Equipment: With cable outlet
- > Suitable for: Häfele Loox5 profile for recess mounting, profile 1104


Supplied with
5 pairs of end caps

Colour/finish	Cat. No.
Black	833.95.769
Silver coloured	833.95.768

Packing: 10 or 50 Piece

→ Diffuser Häfele Loox5

width 8 mm

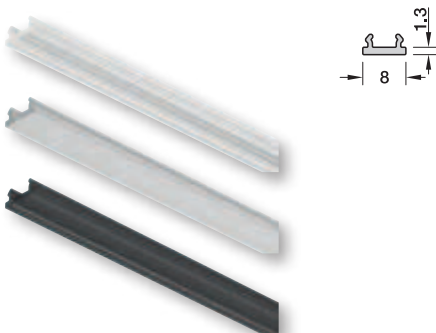

- > Material: Plastic

Note
The opal white diffuser creates a uniform light without points from 120 LEDs/ m. Points are visible with the black and transparent versions.

Supplied with
1 diffuser

Width mm	Diffuser colour/finish	Light permeability	2500 mm	3000 mm
8	Transparent	≈ 90%	833.95.819	833.95.797
	Opal	70–80%	833.95.804	833.95.754
	Black	≈ 20%	833.95.808	833.95.758

Packing: 1 or 25 Piece

DGH-M 2021, HDE-en, 10/20; Dimensional data not binding. We reserve the right to alter specifications without notice.