




2

12/24 V

Profile for recess mounting Häfele Loox5, Profile 1106

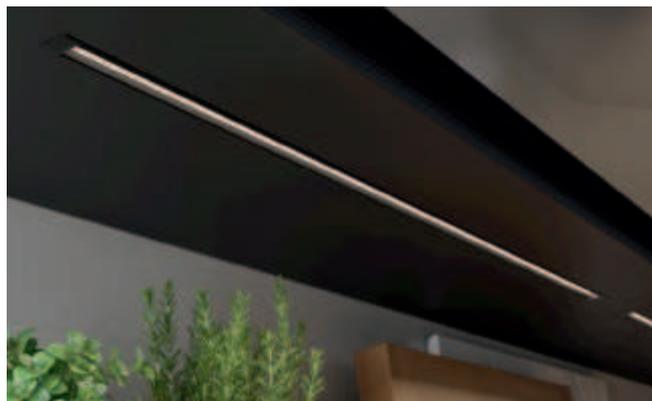

- > Material: Profile: Aluminium, Diffuser: Plastic
- > Internal width: 11 mm
- > Diffuser width: 11 mm
- > Routing width: 16.9 mm
- > Routing depth: 12 mm
- > Installation: For recessing

Note
For LED strip lights up to a width of 5 mm. The surface on the aluminium profile that is to be bonded must be cleaned before bonding to the LED strip lights. It must be completely clean, grease-free and dust-free!

Diffuser
The opal white diffuser creates a uniform light without points from 120 LEDs/ m. Points are visible with black version. If required, please order alternative diffusers in black or transparent separately.

Supplied with
1 aluminium profile
1 diffuser opal white

Colour/finish	Light permeability	2500 mm	3000 mm
Profile: Black, Anodized Diffuser: Opal white	70–80%	833.94.107	833.95.729
Profile: Silver coloured, Anodized Diffuser: Opal white	70–80%	833.94.106	833.95.728

Packing: 1 Piece

End cap, for Häfele Loox5 profile for recess mounting, profile 1106



- > Material: Plastic
- > Equipment: With cable outlet
- > Suitable for: Häfele Loox5 profile for recess mounting, profile 1106
- > Installation: For screwing


Supplied with
5 pairs of end caps with screws

Colour/finish	Cat. No.
Black	833.95.773
Silver coloured	833.95.772

Packing: 10 or 50 Piece

→ Diffuser Häfele Loox5

width 11 mm

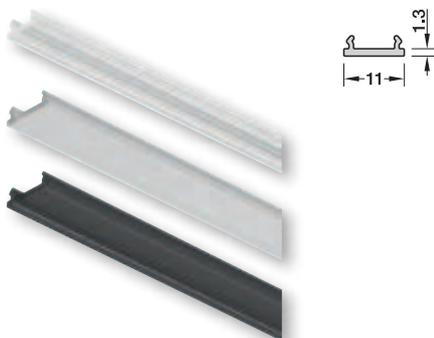

- > Material: Plastic

Note
The opal white diffuser creates a uniform light without points from 120 LEDs/ m. Points are visible with the black and transparent versions.

Supplied with
1 diffuser

Width mm	Diffuser colour/finish	Light permeability	2500 mm	3000 mm
11	Transparent	≈ 90%	833.95.807	833.95.757
	Opal	70–80%	833.95.805	833.95.755
	Black	≈ 20%	833.95.809	833.95.759

Packing: 1 or 25 Piece

DGH-M 2021, HDE-en, 10/20; Dimensional data not binding. We reserve the right to alter specifications without notice.