

Configurable motion detector Häfele Loox5, Modular

Soft on/off switching function, automatic





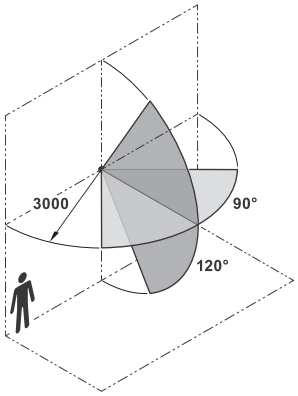

Erfassungsbereich

Installation reference
Coloured cover sleeve suitable for drill hole in furniture and housing. Sensor lens protrudes approx. 5 mm.

Order reference
Please order lead with snap-in connector for modular switches separately. Length 2 m: Cat. No. 833.89.142

> Adjustable delay time via integrated micro switch
> Colour adjustment with supplied cover sleeves

> Version:	Delay time adjustable
> Switching function:	Soft on/off, automatically
> Memory function:	No
> Material:	Plastic
> Dim. (Ø x L):	11.8 x 44.5 mm
> Power consumption:	0.1 W
> Sensor range:	0–3,000 mm
> Sensor angle:	90 °
> Vertical sensor bracket:	120 °
> Degree of protection:	IP20
> Drill hole Ø:	12 mm
> Installation:	For mounting in drilled hole or for plug fitting into housing

Supplied with
1 motion detector adjustable
3 cover sleeves (white, grey, black)


IP20


Delay time	Colour/finish	Cat. No.
30–180 s	white/grey/black	833.89.333
300–1,800 s	white/grey/black	833.89.335

Packing: 1 or 50 pieces


Sensor switch Häfele Loox, modular

Switching function Touchless soft on/off









> Switching function:	On/off soft, touchless
> Memory function:	Last state after power-off
> Material:	Plastic
> Dim. (L x W x H):	40 x 40 x 8.5 mm
> Power consumption:	0.3 W
> Sensor range:	0–80 mm
> Degree of protection:	IP20
> Installation:	For glue fixing For screw fixing

Supplied with
1 switch with fixing material

IP20

Colour/finish	Cat. No.
Silver coloured	833.89.136
Black	833.89.180
White	833.89.181

Packing: 1 or 50 pieces

Order reference
Please order lead with snap-in connector for modular switches separately. Length 2 m: Cat. No. 833.89.142

Häfele Loox lead for modular switches ▶ FF 2.123
Housing for Häfele Loox switch ▶ FF 2.125

DGH-M-INT 2020, HDE-en, 05/19; Dimensional data not binding. We reserve the right to alter specifications without notice.