


# Bendable Serrated Aluminum Profile




It is an expanded design of the serrated aluminum profile, and caters for the continuously streamlined aesthetics of curve shape. The secondary precision cutting process, not only maintains the advantage of clamping force, but also enables the two-way horizontal bending directions with super shape memory.

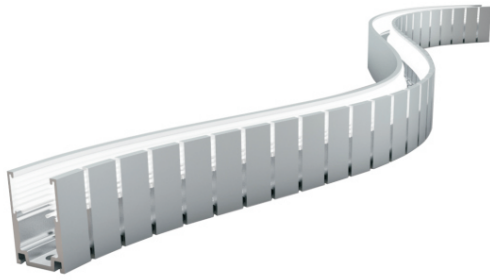


Please refer to the applicable installation ways.

Test Object	No.	Experiment Item	Standard
Metal Parts	1	Weather Resistance-Salt Spray	IEC 68-2-11
Mounting profile	2	Clamping force	CLEAR-defined

## Dimension: mm

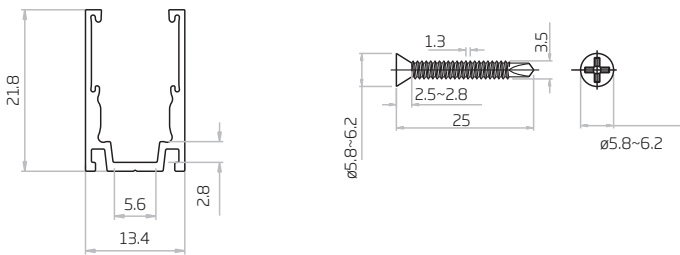

Tolerance:  $\pm 0.2\text{mm}$

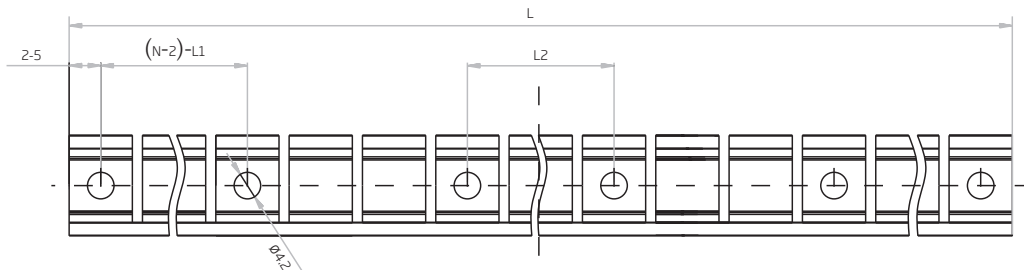

Note:

- 1, 2-5 refers to two of symmetric 5mm in each piece of profile.
  - 2, (N-2)·L1 refers to (N minus two) of symmetric L1 in each piece of profile.
- "N" hereby stands for its corresponding "Hole Number" in the below table

Item Code	Standard Length	L1	L2	Screw Hole	Hole Number
F10-BSA/PL-500MM-AL	500mm/19.68in	116.5mm/4.59in	23.3mm/0.92in	$\phi 4.2\text{mm}/0.17\text{in}$	6
F10-BSA/PL-1000MM-AL	1000mm/39.37in	116.5mm/4.59in	58.2mm/2.29in	$\phi 4.2\text{mm}/0.17\text{in}$	10