

F22 Thickened Plastic Profile




It uses thickened PC profile to 3mm thickness, specialized for underwater application up to 2m depth, and has excellent properties in rust, corrosion and fracture resistance.



Please refer to the applicable installation ways.

Test Object	No.	Experiment Item	Standard
Mounting profile	1	Clamping force	CLEAR-defined

Dimension: mm



Tolerance: $\pm 0.3\text{mm}$

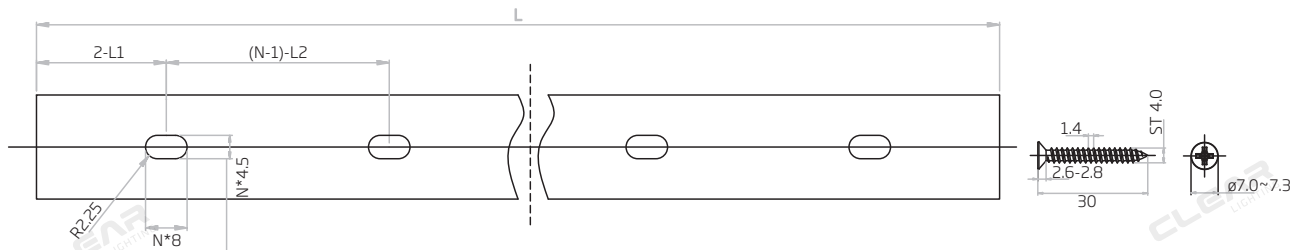

Note:

- 2-L1 refers to two of symmetric L1 in each piece of profile.
 - (N-1)-L2 refers to (N minus one) of symmetric L2 in each piece of profile.
- "N" hereby stands for its corresponding "Hole Number" in the below table

Item Code	Standard Length	L1	L2	Slotted Hole	Hole Number
F22-TP/PL-35MM-TT	35mm/1.38in	17.5mm/0.69in	/	4.5*8mm/0.18*0.31in	1
F22-TP/PL-500MM-TT	500mm/19.68in	50mm/1.97in	200mm/7.87in	4.5*8mm/0.18*0.31in	3
F22-TP/PL-1000MM-TT	1000mm/39.37in	100mm/3.93in	200mm/7.87in	4.5*8mm/0.18*0.31in	5
F22-TP/PL-2000MM-TT	2000mm/78.74in	100mm/3.93in	200mm/7.87in	4.5*8mm/0.18*0.31in	10