


Häfele Loox5 LED 3141

LED strip light 24 V, 5 mm, 160 LEDs/m, 6 W/m, IP20

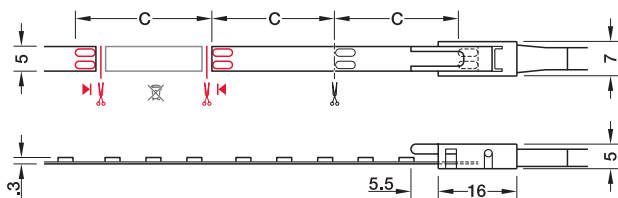

C = Section length

2700 K	3000 K	4000 K	5000 K	120°	
1860 lx	1960 lx	2000 lx	2060 lx		250 mm
790 lx	850 lx	860 lx	860 lx		500 mm
440 lx	470 lx	480 lx	480 lx		750 mm
270 lx	290 lx	290 lx	290 lx		1000 mm

Illuminance value in lx applies to 1 m strip length, without diffuser

- > High luminous efficacy
- > Extremely narrow – width 5 mm
- > Equipped with high-quality CREE LEDs



- > Dimmable: Yes
- > Material: Plastic
- > Colour: White
- > Strip width: 5 mm
- > Strip height: 1.3 mm
- > Section length: 50 mm
- > Contact surface length: 4 mm
- > Number of LEDs/m: 160
- > Life time: L80/B10 >50000 h, L70/B50 >80000 h
- > Colour rendering index Ra: 92
- > Colour rendering index R9: >50
- > Degree of protection: IP20
- > Installation: Self-adhesive

Note

Maximum strip length (visual) describes a strip section with a visually imperceptible drop in luminous flux of max. 30%. Please note: A strip section with a new power supply that follows immediately is noticeably brighter. Max. wattage-dependent strip length on the driver, see technical data for LED strip lights.

Supplied with

1 roll



Colour temperature K	Light colour	Wattage/m W	Luminous flux/m lm	Luminous efficacy lm/W	Max. strip length (visual) m	Energy efficiency class	5 m	50 m
2700	Warm white	6	870	145	5		833.76.205	833.76.435
3000	Warm white	6	930	155	5		833.76.206	833.76.436
4000	Cool white	6	955	159	5		833.76.207	833.76.437
5000	Cool white	6	990	165	5		833.76.208	833.76.438

Packing: 1 or 30 Pieces

Order reference




Please order lead separately.

Aluminium profiles recommended for appealing design, diffuse light distribution, mechanical protection and heat management.

Accessories, for LED strip lights monochrome, 5 mm

→ Lead, Häfele Loox5 for LED strip light, monochrome, 5 mm, 3.5 A

5 24 V



Cable length mm

Cable length mm	Cat. No.
100	833.93.741
500	833.95.875
2000	833.95.711



Packing: 1, 10 or 100 Piece



2

12/24 V


→ Interconnecting lead, Häfele Loox5 for LED strip light, monochrome, 5 mm, 3.5 A



Cable length mm

Cable length mm	Packing Piece	Cat. No.
50	1, 10 or 200	833.89.194
500	1, 10 or 200	833.89.195
2000	1, 10 or 100	833.89.196

→ Clip connector, Häfele Loox5 for LED strip light, monochrome, 5 mm, 3.5 A



	Cat. No.
Clip connector	833.89.207

Packing: 10, 50 or 200 Piece

→ Corner connector, Häfele Loox5 for LED strip light, monochrome, 5 mm, 3.5 A



	Length mm	Width mm	Cat. No.
Corner connector	21	21	833.89.190


Packing: 10, 50 or 200 Piece

→ Power supply set with 6-way distributor Häfele Loox5, 24 V

5 24 V



230 V ~ C (EU)



Supplied with

1 driver
1 6-way distributor
1 mains lead 2 m with flat Euro plug

Distributor version	20 W	40 W	90 W
With switching function	833.77.963	833.77.964	833.77.965
Häfele Connect Mesh	833.77.960	833.77.961	833.77.962

Packing: 1 Set