

LED strip lights


Monochrome, 5 mm



Häfele Loox5 LED 2060/2061/3040/3041



LED 2060/2061



LED 3040/3041

EXTRA NARROW 5 mm

Illuminance value in lx applies to 1 m strip length:

2700 K	3000 K	4000 K	5000 K	120°	
940 lx	970 lx	1000 lx	1030 lx		250 mm
400 lx	420 lx	430 lx	430 lx		500 mm
220 lx	235 lx	240 lx	240 lx		750 mm
135 lx	145 lx	145 lx	145 lx		1000 mm

LED 2060/3040

2700 K	3000 K	4000 K	5000 K	120°	
1860 lx	1960 lx	2000 lx	2060 lx		250 mm
790 lx	850 lx	860 lx	860 lx		500 mm
440 lx	470 lx	480 lx	480 lx		750 mm
270 lx	290 lx	290 lx	290 lx		1000 mm


LED 2061/3041

Equipped with high-quality Samsung LEDs

- > Dimmable: Yes
- > Material: Plastic
- > Finish/colour: White
- > Width: 5 mm
- > Height: 1.3 mm
- > Life time L80/B10: >50,000 h
- > Energy efficiency class: A+
- > Degree of protection: IP20
- > Mounting: Self-adhesive
- > Supplied with: 1 roll

Order reference:
Please order lead separately.

Aluminium profile recommended from 9.6 W/m, see page 20

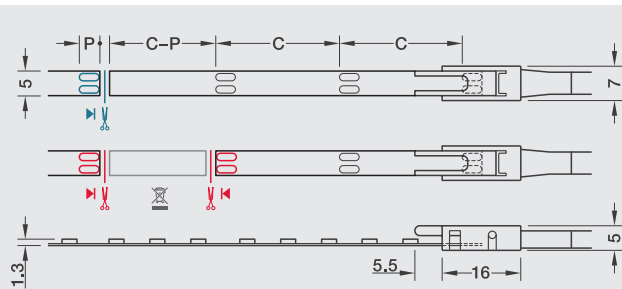

- Cut LED strip light to length
(one contact side remains on the remainder piece; reusable)
- Connect LED strip lights
(two contact sides required)

C = section length
P = length of contact surface

5 12V Loox5 12 V driver see page 121


5 24V Loox5 24 V driver see page 122

Häfele Loox5 LED 2060/2061/3040/3041

Voltage V	Quantity LEDs/m	Colour temperature K	Wattage W/m	Luminous flux lm/m	Luminous efficacy lm/W	Colour rendering index CRI		Weight. energy consumpt. per m in kWh/1000 h	Section length C mm	Length of contact surface P mm	Max. strip length (visual) m	Available length		
						R _a	R ₉					5 m	15 m	
5_{12V}	Häfele Loox5 LED 2060													
	120	2700	4.8	440	92	>90	>50	5.28	25	3	4.0	833.74.320	833.74.324	
		3000	4.8	460	96	>90	>50	5.28	25	3	4.0	833.74.321	833.74.325	
		4000	4.8	480	100	>90	>50	5.28	25	3	4.0	833.74.322	833.74.326	
		5000	4.8	495	103	>90	>50	5.28	25	3	4.0	833.74.323	833.74.327	
	Häfele Loox5 LED 2061													
	120	2700	9.6	870	91	>90	>50	10.56	25	3	3.0	833.74.328	833.74.332	
		3000	9.6	930	97	>90	>50	10.56	25	3	3.0	833.74.329	833.74.333	
		4000	9.6	955	99	>90	>50	10.56	25	3	3.0	833.74.330	833.74.334	
		5000	9.6	990	103	>90	>50	10.56	25	3	3.0	833.74.331	833.74.335	
	5_{24V}	Häfele Loox5 LED 3040												
		120	2700	4.8	440	92	>90	>50	5.28	50	3	8.0	833.76.300	833.76.304
			3000	4.8	460	96	>90	>50	5.28	50	3	8.0	833.76.301	833.76.305
			4000	4.8	480	100	>90	>50	5.28	50	3	8.0	833.76.302	833.76.306
			5000	4.8	495	103	>90	>50	5.28	50	3	8.0	833.76.303	833.76.307
		Häfele Loox5 LED 3041												
120		2700	9.6	870	91	>90	>50	10.56	50	3	5.5	833.76.308	833.76.312	
		3000	9.6	930	97	>90	>50	10.56	50	3	5.5	833.76.309	833.76.313	
		4000	9.6	955	99	>90	>50	10.56	50	3	5.5	833.76.310	833.76.314	
		5000	9.6	990	103	>90	>50	10.56	50	3	5.5	833.76.311	833.76.315	



Maximum visual strip length applies for an imperceptible drop in luminous flux of max. 30%.
Maximum wattage-dependent strip length on the driver, see page 126.




> 3.5 A/20 AWG lead
for LED strip light 5 mm

Voltage	Length mm	Cat. No.
5_{12V}	2000	833.95.705
5_{24V}	2000	833.95.711



> 3.5 A clip connector
for 5 mm LED strip light

	Cat. No.
Clip connector	833.89.207



> 3.5 A/20 AWG interconnecting lead
for 5 mm LED strip light

Length mm	Cat. No.
50	833.89.194
500	833.89.195
2000	833.89.196



> Corner connector, 90° rigid, 3.5 A
for left or right for 5 mm LED strip light

	Cat. No.
Corner connector rigid	833.89.190